

J42

Meter Service Regulator

Inlet Pressure 350mbar

Nominal Diameter $\frac{3}{4}$ " x $\frac{3}{4}$ " & $\frac{3}{4}$ " x MU



Applications

- Residential

Brief information

Operation: The J42 meter service regulator is a completely new design to meet the current standards. It uses well proven principles of control dynamics together with modern assembly techniques to produce a regulator which offers excellent performance in a compact, low cost, maintenance free unit.

Application: The J42 is an angled type regulator designed for low pressure domestic meter applications with inlet pressures up to 350mb, with full lock-up capability and is available with or without integral under pressure cut off (UPCO). The UPCO version has an automatic reset which re-establishes supply dependant upon the system integrity. The J42 can be mounted in either a vertical or horizontal orientation, and is suitable for use with natural, liquefied petroleum and manufactured gases.

Control: The outlet pressure of the regulator is set at the factory to the customer's specification, and the unit sealed. The outlet pressure can be easily adjusted if necessary by breaking the seal and turning the spring adjusting screw under the top cap. Thus making unauthorised adjustment tamper evident. The top cap may be resealed again after use with a lead seal (not provided).

Approvals: The J42 meter service regulator is approved to British Gas Specification PRS3 and the Dutch Gastec Approval Requirements No.11. The J42 is patented no. 2317672.

Technical Data:

Maximum inlet pressure: 350mbar (5 psig)
Pi max PRS3 Application: 75mbar
Pi max Gastec Application: 200mbar
Outlet Pressure: Customer specified between 10 – 40 mbar
UPCO Trip Pressure: Customer specified between 4 – 25 mbar

Servicing: The J42 is a sealed unit and requires no servicing.

Main features

- Sizes $\frac{3}{4}$ " x $\frac{3}{4}$ " & $\frac{3}{4}$ " x Meter Union
- Temperature range -20°C to +70°C
- Threaded connections to BS EN 10226 (ISO 7) or NPT (other threads may be available upon request)
- Fully inlet pressure balanced
- Full lock-up capability
- Internal impulse
- Spring loaded
- Excellent outlet pressure control

Options

- Under pressure cut off
- Meter union outlet connection
- Inlet mesh filter

J42: Meter Service Regulator

Material Specifications

A summary of the material specification for the J42 is given for reference. All material has been selected to provide maximum durability and reliability in service.

Components	Specification
Body and Top Cover	Aluminium
Diaphragms	Nitrile Rubber (Buna)
Valve Disc and "O"Rings	Nitrile Rubber (Buna)
Internal Support Structure	Acetal Resin
Top Cap	Acetal Resin (UV Stabilised)
Top Bush, Adjusting Screw	Zinc Alloy
Spring	Stainless Steel



Weight: Standard Regulator: 320g
Regulator with UPCO: 340g

Quality:

Elster Jeavons is committed to a programme of continuous quality enhancement. All equipment designed and manufactured by the Elster-Instromet group benefits from the group's quality assurance standards which are approved to EN ISO9001:2008.

Performance:

Tested in accordance with PRS3

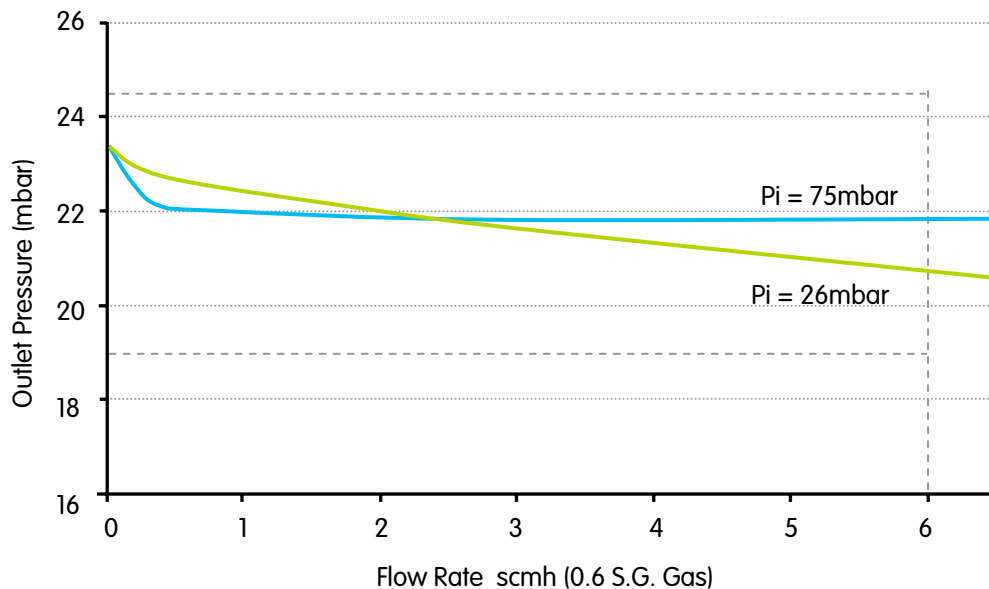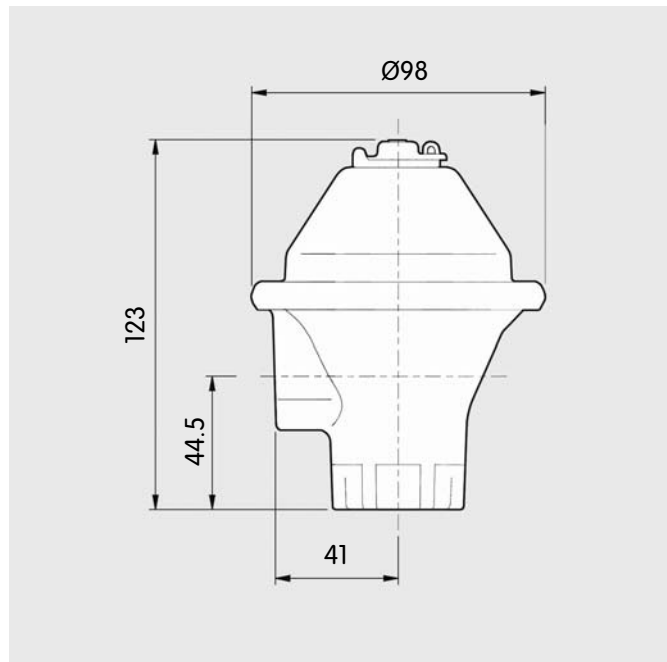

Contacts

United Kingdom
Elster Jeavons
Paton Drive, Tollgate Business Park,
Beaconside, Stafford, Staffs. ST16 3EF
T +44 1785 275200
F +44 1785 275305
www.elster-instromet.com
info.jeavons@gb.elster.com

Germany
Elster GmbH
Steinern Str. 19 - 21
55252 Mainz-Kastel
T +49 6134 605 0
F +49 6134 605 223
www.elster-instromet.com
info@elster-instromet.com

USA
Elster American Meter
2221 Industrial Road
Nebraska City, NE 68410-6889
T +1 402 873 8200
F +1 402 873 7616
www.elster-meterservices.com

J421EN03

A22.12.2009